
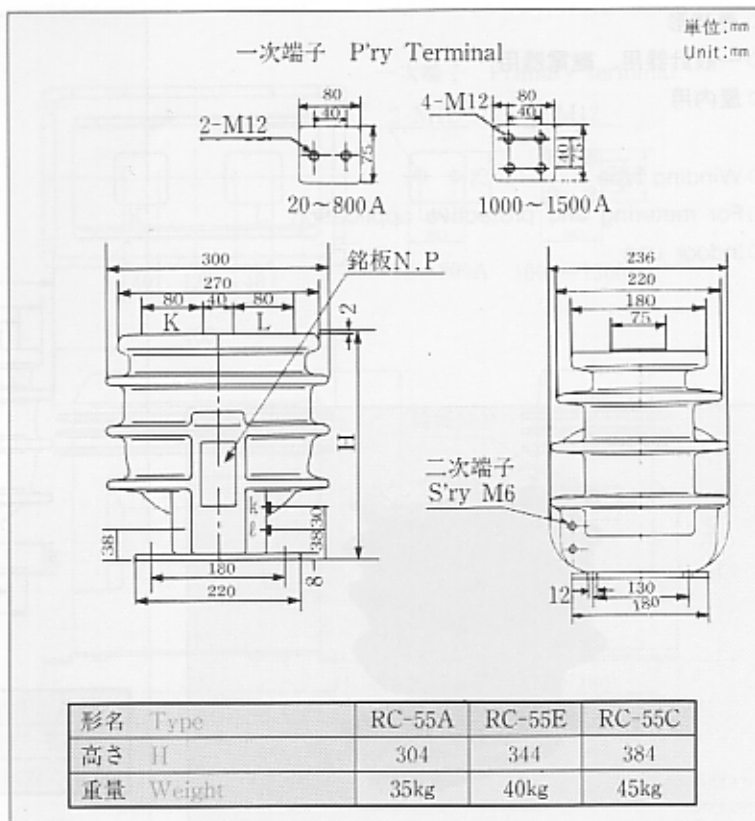


特別高圧用巻線形変流器

WINDING TYPE CURRENT TRANSFORMER (23kV, 34.5kV)

(RC-55A, E, C)

- 巻線形
- 一般計器用、継電器用
- 屋内用
- Winding type
- For metering and protective application
- Indoor use

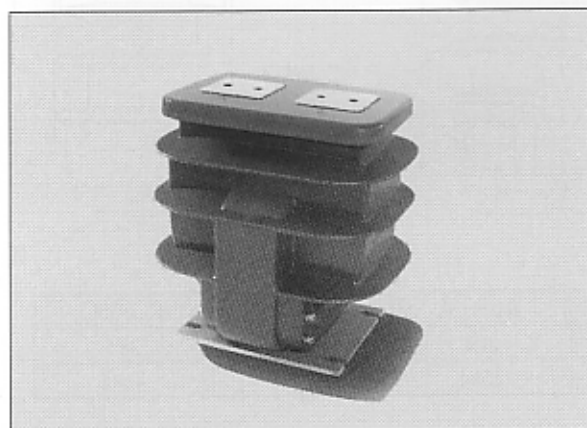

形名 Type	RC-55A		RC-55E		RC-55C
準拠規格 Standard	JEC-1201				
最高電圧 Max. voltage	23kV		34.5kV		34.5kV
絶縁階級 Insulation level	20-A		30-B		30-A
定格過電流 Short time current ※	500In·1sec (single ratio) max. 25kA·1sec 150In·1sec (double ratio) max. 25kA·1sec				
周波数 Frequency	50, 60Hz				
定格負担 Rated burden	40VA				
過電流定数 Over current constant	N > 5 (20~100A) N > 10 (150~1500A)				
精度階級 Accuracy class	1PS				
一次電流 P'ry current(A)	20	30	40	50	60
	75	80	100	150	200
	300	400	500	600	750
	800	1000	1200	1500	
	40-20	60-30	80-40	100-50	
	150-75	200-100	300-150	400-200	
二次電流 S'ry current(A)	600-300	800-400	1000-500	1200-600	
	1500-750				
			5		1

標準仕様 Standard specification

- ※ 20~40A(シングルレシオ)の定格過電流は300In·1sec
- ※ Short time current of 20~40A single ratio is 300In·1sec.